

AiM Infotech

AiM 0-15 PSI  
pressure sensor


Release 1.00

---





The sensor end with a 4 pins Binder 719 male connector. Here below the connector view – sensor side on the left and device side on the right – are shown; while in the following table is connector pinout.

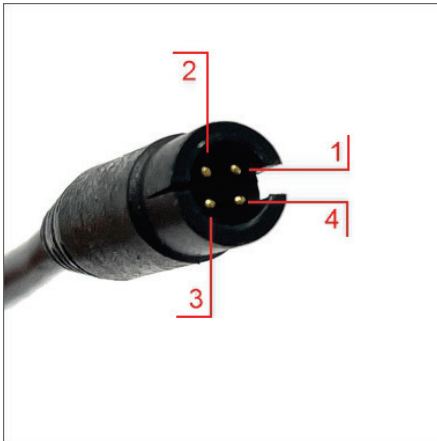

Pin	Function
1	Analog signal
2	GND
3	+Vb
4	Not connected

Cable colour
White
Black
Red

The table here below shows the sensor electrical characteristics.

Technical characteristics	Value
Supply	8-16 V
Accuracy	< +/- 0.5% FS (CLNH – combined non-linearity and hysteresis)
Output signal	from 0.5 V to 4.5 V
Characterisation	500 mV/ 0 PSI 4500 mV/ 15 PSI
Consumption	< 10 mA
Temperature working range	from -20°C to 135°C
Sealing	IP66
Housing	316 stainless steel
Weight	30 g
Cable length	500 mm
Thread	1/8 NPT

### 3

## Extension cables

---

The sensor is sold with a 50 cm cable. Standard length extension cables are available, whose part number changes according to their length and to the product the sensor is to be connected to.

Extension cable for connection to:

- MXG/MXG 1.2/MXG 1.2 Strada
- MXS/MXS 1.2/MXS Strada/MXS 1.2 Strada
- MXP/MXP Strada
- MXL2
- MXm
- EVO5
- MXL Strada/Pista/Pro05

Part numbers:

**V02PCB05B** - cable length: 500mm

**V02PCB10B** - cable length: 1000mm

**V02PCB15B** - cable length: 1500mm

**V02PCB20B** - cable length: 2000mm

**V02PCB25B** - cable length: 2500mm

**V02PCB30B** - cable length: 3000mm



Extension cable for connection to:

- Channel Expansion
- EVO4
- EVO4S

Part numbers:

**V02PCB05BTXG** - cable length: 500mm

**V02PCB10BTXG** - cable length: 1000mm

**V02PCB15BTXG** - cable length: 1500mm

**V02PCB20BTXG** - cable length: 2000mm

**V02PCB25BTXG** - cable length: 2500mm

**V02PCB30BTXG** - cable length: 3000mm

